

## Loughborough University Institutional Repository

---

# *Energy absorbing car seat designs for reducing whiplash*

This item was submitted to Loughborough University's Institutional Repository by the/an author.

**Citation:** HIMMETOGLU, S. ... et al, 2008. Energy absorbing car seat designs for reducing whiplash. World Congress on Neck Pain, 20th-22nd January 2008, The Hyatt Regency Century Plaza, Los Angeles, California.

#### **Additional Information:**

- This is an Author's Original Manuscript. This conference paper was subsequently published by Taylor & Francis Group in Traffic Injury Prevention on 4th December 2008, available online: <http://www.tandfonline.com/10.1080/15389580802365767>.

**Metadata Record:** <https://dspace.lboro.ac.uk/2134/15697>

**Version:** Submitted for publication

**Publisher:** © Taylor & Francis Group, LLC

**Rights:** This work is made available according to the conditions of the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International (CC BY-NC-ND 4.0) licence. Full details of this licence are available at: <https://creativecommons.org/licenses/by-nc-nd/4.0/>

Please cite the published version.

# Energy-Absorbing Car Seat Designs for Reducing Whiplash

S. HIMMETOGLU, M. ACAR, K. BOUAZZA-MAROUF, and A. J. TAYLOR

Wolfson School of Mechanical and Manufacturing Engineering, Loughborough University, Loughborough, Leicestershire, UK

*Objectives:* This study presents an investigation of anti-whiplash features that can be implemented in a car seat to reduce whiplash injuries in the case of a rear impact. The main emphasis is on achieving a seat design with good energy absorption properties.

*Methods:* A biofidelic 50th percentile male multi-body human model for rear impact is developed to evaluate the performance of car seat design concepts. The model is validated using the responses of 7 volunteers from the Japanese Automobile Research Institute (JARI) sled tests, which were performed at an impact speed of 8 kph with a rigid seat and without head restraint and seatbelt. A generic multi-body car seat model is also developed to implement various seatback and recliner properties, anti-whiplash devices, and head restraints. Using the same driving posture and the rigid seat in the JARI sled tests as the basic configuration, several anti-whiplash seats are designed to allow different types of motion for the seatback and seat-pan.

*Results:* The anti-whiplash car seat design concepts limit neck internal motion successfully until the head-to-head restraint contact occurs and they exhibit low  $NIC_{max}$  values ( $7 \text{ m}^2/\text{s}^2$  on average). They are also effective in reducing neck compression forces and T1 forward accelerations. In principle, these car seat design concepts employ controlled recliner rotation and seat-pan displacement to limit the formation of S-shape. This is accomplished by using anti-whiplash devices that absorb the crash energy in such a way that an optimum protection is provided at different severities.


*Conclusions:* The results indicate that the energy absorbing car seat design concepts all demonstrate good whiplash-reducing performances at the IIWPG standard pulse. Especially in higher severity rear impacts, two of the car seat design concepts reduce the ramping of the occupant considerably.

**Keywords** Whiplash; Car Seat Design; Rear Impact; Human Body Model; Head-and-Neck Model

## INTRODUCTION

Injury to the human neck is a frequent consequence of road traffic accidents. The term *whiplash* is used to describe these injuries or disorders in which the sudden differential movement between the head and torso leads to damage of soft tissue in the neck. The annual economic cost of whiplash injury has been estimated to be \$8.2 billion in the United States (Edwards et al., 2005) and \$1.2 billion in the U.K. (Avery et al., 2007). The highest risk of sustaining whiplash injury has been found to occur in rear-end collisions (Avery et al., 2007; Jakobsson et al., 2000; Watanabe and Ito, 2007).

Although improving head restraint geometry is the first step in reducing injury risk in case of a rear impact, research has shown that seats with good head restraint geometry do not always offer good protection dynamically. If the seat is not properly designed, the occupant can deflect the seatback and head restraint unfavorably. This can delay head contact time with the head restraint and lead to higher neck loads. The ramping of the occupant becomes worse at relatively higher impact severities especially if no seatbelt is worn. In such cases the head restraint may not be able to restrict the motion of the head. Moreover, seatbacks with strong structural cross-members do not allow the occupant to sink into the seatback; this hinders energy absorption and acts against reducing the backset between the head and the head restraint. Such structural cross-members can load the upper torso severely and lead to S-shape deformation in the neck. A strong rebound of the seatback can also exacerbate injury, especially in higher severity rear impacts. These problems can be overcome by designing seats that provide good energy absorption and/or early head support as recommended by International Insurance Whiplash Prevention Group (IIWPG, 2006).

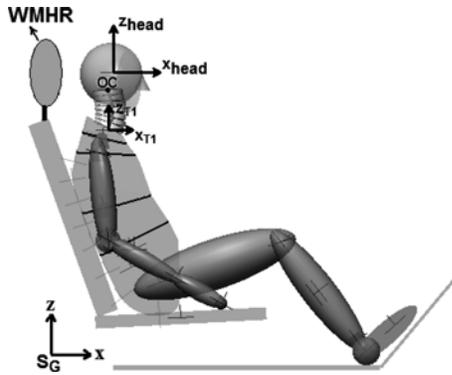


**Figure 1** The human body model in its initial position.

## METHODS

### *Design and Validation of a 50th Percentile Male Multi-Body Rear-Impact Human Body Model*


The human body model has been developed by using MSC VisualNastran 4D with Matlab-Simulink, and validated using the responses of 7 volunteers from the JARI (Japanese Automobile Research Institute) sled tests (Himmetoglu, 2008), which were performed at an impact speed of 8 kph with a rigid seat and without head restraint and seatbelt (Davidsson et al., 1999). The human body model as shown in Figure 1 is composed of rigid bodies connected by rotational springs and dampers. The body shape of the human body model is based on the typical or normal driving posture of an average 50th percentile male (Schneider et al., 1983). The head-and-neck section of the human body model was separately validated by specifying the motion of T1 (the first thoracic vertebra) as obtained from the JARI sled tests. The head-and-neck model, which was shown to simulate the effects of active muscle response, is described in detail by Himmetoglu et al. (2007).

The torso model is composed of five bodies with the locations of the joints chosen by analyzing the spinal vertebra and pelvis rotations of the JARI sled test volunteers (Ono et al., 1999). The vertebrae that rotated together as a unit are grouped as one separate body. The torso joints are placed approximately at the anatomical locations of T3 (the third thoracic vertebra), T5

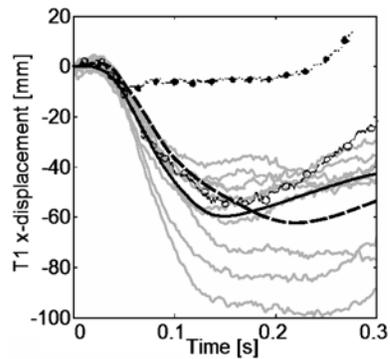

-- Hybrid III, — BioRID P3, --- TNO, — Mode

**Figure 2** T1 x displacements (--- Hybrid III, — BioRID P3, --- TNO, — model).

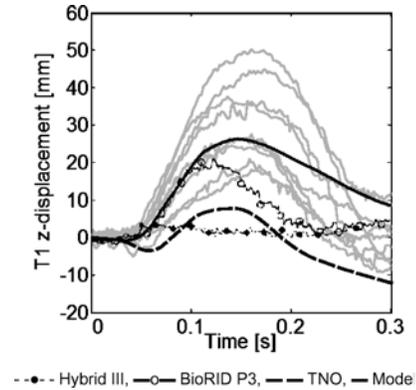


**Figure 3** T1 z-displacements (--- Hybrid III, BioRID P3, TNO, model).


(the fifth thoracic vertebra), T11/T12 (between the eleventh and twelfth thoracic vertebrae), and L3/L4 (between the third and fourth lumbar vertebrae). For the neck joints, a time-varying damping coefficient function based on the recorded EMG response of the neck muscles was found to better represent the volunteer responses. The damping functions for the torso joints also vary in time and this is considered to reflect the equivalent increase in resistance at the joints due to muscle contraction (Himmelstoglu, 2008).

The responses of the proposed human body model are validated using the JARI volunteer responses, as provided by van der Horst (2002). In Figures 2 to 5, the model responses are shown together with the responses of the JARI volunteers (grey lines) and the responses of Hybrid III and BioRID P3 dummies and TNO model that had been subjected to the same impact conditions. BioRID P3 and HIII (Hybrid III) responses are given by Davidsson et al. (1999). TNO responses indicate the behavior of the human body model of TNO Automotive combined with the detailed head-and-neck model developed by van der Horst (2002).

Figures 2 and 3 show the displacement of T1 relative to the sled in the x and z directions, respectively, expressed in the inertial coordinate system  $S_G$  shown in Figure 1. Figure 4 displays the head angle with respect to T1. Figure 5 depicts the

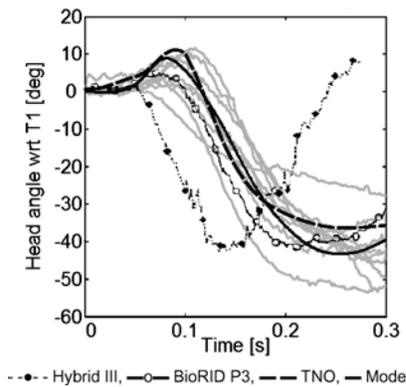

**Figure 4** Head angles wrt T1 (--- Hybrid III, BioRID P3, TNO, model).

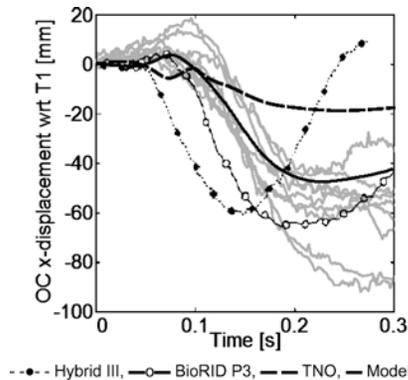

**Figure 5** OC x displacements wrt T1 (--- Hybrid III, BioRID P3, TNO, model).

displacement of OC (occipital condyles) in the x direction with respect to T1, expressed in the T1 anatomical coordinate system attached to T1 as shown in Figure 1. Figures 2 to 5 demonstrate that the human body model shows biofidelic behavior of the head-and-neck motion when subjected to the same rear-impact conditions as in the JARI volunteer sled tests.

#### *Car Seat Design Methodology*

An anti-whiplash seat should absorb as much energy as possible while reducing the occupant acceleration and minimizing the relative movements between the adjacent cervical vertebrae. The following design criteria are considered to be essential for a car seat equipped with anti-whiplash features:

1. Good head restraint geometry in terms of head restraint height and backset
2. Effective crash energy-absorbing characteristics
3. Minimum neck internal motion (OC relative to T1 motion), reduced S-shape (or retraction)
4. Low neck forces (compression, tensile, shear) and moments
5. Reduced ramping
6. Minimum rearward displacement of the seat
7. Limited seatback rebound
8. No activation of anti-whiplash devices during normal use
9. Improved performance at all impact severities

It is well established that a head restraint with good stiffness and energy-absorbing characteristics, positioned at the right height and with a small backset distance, would significantly reduce whiplash risk. Therefore, this study focuses on the development of seat designs with good energy-absorbing characteristics that can later be combined with a good head restraint. Hence, in the computational simulations, head restraints are not included. Moreover, without the help of a head restraint, the effectiveness of seat designs in limiting neck internal motion can be better identified. In addition, as in the JARI volunteer sled tests, a seat-belt is also not included in the models. Forward rebound is also minimized by using high damping characteristics in the forward direction.

Using the same driving posture as in the JARI volunteer sled tests (Davidsson et al., 1999) and the rigid seat model, several anti-whiplash car seat design concepts have been considered. The rigid seatback without a head restraint and seatbelt can be regarded as one of the worst systems for rear impact. A rigid seatback could imitate, to some extent, the adverse effects of a seatback with strong structural cross-members and very stiff foam that do not allow the torso to sink into the seatback significantly. Without the seatbelt, the occupant runs the risk of ramping up the seatback and even ejecting in high severity rear impacts. Developing seat design concepts with a rigid seatback can be considered as a practical approach in multi-body dynamic modeling, since the seatback stays rigid for all conditions, while in the case of a typical car seat with a degree of frame compliance, foam stiffness and suspension movement, the dynamic characteristics need to be correctly estimated for all impact speeds.

A high severity crash pulse of  $b.V$  ( $\Delta V$ ) = 35 kph with mean and peak accelerations of 7.1 and 16 g, respectively, is used to set the limits for the rotation of the seatback and the seat rearward displacement in order to prevent ejection and impact with the rear seat. This crash pulse, which is derived from FMVSS301 flat moving barrier test results (Viano, 2002), represents quite a severe case. Therefore, at this extreme condition, the maximum seat-pan rearward displacement allowed is set to be 10 cm and the maximum seatback angle allowed from the vertical for the retention of unbelted occupant is set as 40 degrees. This amount of rotation is based on the results of the human body model simulations performed at this severe pulse with an initial seatback angle of 20 degrees from the vertical and with a friction coefficient of 0.35 for all surfaces between the human body and the seat. This friction coefficient is based on the experimental data given by Verver (2004).

### *Test Procedure*

In order to test the car seat design concepts using the human body model, the hands and arms are positioned as shown in Figure 1 to adopt a posture practiced in whiplash dynamic tests (IIWPG, 2006). A head restraint, called WMHR, is attached to the seatback but in the simulations the head is allowed to penetrate WMHR freely without resistance; hence, it has no effect on the motion of the head. This simulates the free head motion in the JARI volunteer sled tests and also allows the evaluation of the effectiveness of the seat in limiting neck internal motion until the head contacts the head restraint. The initial seatback angle is set to 20 degrees from the vertical as in the JARI sled tests.

The head restraint WMHR satisfies the minimum height requirement by the European standard (UN-ECE Regulation No. 17; Edwards et al., 2005). Nonetheless, an additional vertical height of 35 mm is added for this head restraint in order to compensate for the spine straightening. This value corresponds to the average upward displacement of T1 as obtained in the JARI volunteer sled tests (see Figure 3). Hence, the top of WMHR becomes level with the top of the head. Avery and Weekes (2006) suggested that backset values less than 45 mm could cause

discomfort. Hence, the backset for WMHR is set to 60 mm, within the range of a good head restraint geometry, to allow head comfort. The depth of WMHR is selected as 100 mm.


IIWPG (2006) specifies head restraint contact time, maximum T1 forward acceleration, upper neck (rearward) shear, and tension forces for the dynamic rating of seats and head restraints. For this purpose, IIWPG uses a standard dynamic test performed at  $b.V = 16$  kph with  $a_{\text{mean}} = 5$  g and  $a_{\text{peak}} = 10$  g. In order to evaluate the anti-whiplash seat design concepts as well as the rigid seat, and to compare the results with the IIWPG criteria, the standard dynamic crash test pulse specified by the IIWPG was used in the simulations.

In the human body model, the OC loads on the head are expressed in the head coordinate system located at the head center of gravity as shown in Figure 1. The positive shear and the positive normal forces on the head are defined in the directions of  $+x$  and  $+z$  axes of the head coordinate system, respectively; therefore, tensile force is negative and compression force is positive by definition. As in dummies, these forces and moments are assumed to be acting at the OC. The maximum T1 forward acceleration is taken as the highest acceleration of T1 in the  $x$  direction, as expressed in the coordinate system  $S_G$  (see Figure 1). Although IIWPG criteria are specified for the BioRIDIIg dummy only, these specifications can still be used for the human body model for comparison purposes.

### *The Characteristics of the Anti-Whiplash Car Seat Design Concepts*

A number of energy-absorbing car seat design concepts comprising anti-whiplash devices (AWDs) are proposed and the motions that they induce on the human body model, when subjected to rear impact, are investigated. These concepts allow the motions for the seatback and seat-pan to be independent of each other. They are controlled by passive anti-whiplash devices consisting of spring and damper units. These devices become operational only when the corresponding breakaway forces and/or torques are exceeded. Therefore, the crash energy is absorbed by these devices in such a way that an optimum protection is provided at different severities. The required characteristics of the AWDs were determined using a wide range of crash pulses ( $b.V$  between 4.5 and 35 kph) with different severities and pulse shapes (Linder et al., 2001, 2003; see also <http://www.folksam.se>). Figure 6 shows six design concepts for anti-whiplash car seats. For all seats, the masses of the seat and head restraint are representative of typical car seats (Verver, 2004).

In this article, the abbreviation RG is used to represent the basic rigid seat that simulates the seat used in the JARI volunteer sled tests. RO (recliner only) represents the modified rigid seat with a rotational spring-damper AWD, which enables the seatback to rotate with respect to a fixed seat-pan, whereas seat-pan only (SPO) has a horizontal translational spring-damper AWD, which permits the whole seat to translate backwards. In SPO, there is no rotational motion between the seatback and the seat-pan.

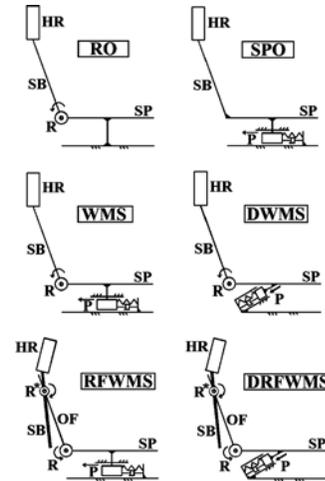


**Figure 6** Anti-whiplash car seat design concepts (HR: head restraint, SB: seatback, SP: seat-pan, OF: outer seatback frame, P: translational AWD, R & R\*: rotational AWD).

The seat design concept WMS combines both the translational and rotational AWDs used in SPO and RO, respectively, whereas the DWMS concept has the same two AWDs as WMS but with the translation AWD inclined by 30 degrees from the horizontal, allowing the seat-pan to have both backward and downward motions simultaneously. For these two designs, the rotational and translational AWDs are activated when  $b.V(\text{kph}) > 4.5$  and  $10.5$ , respectively.

The downward motion is introduced in order to reduce the compression forces that occur due to spine straightening in the very early stages of the impact. A 30 degree incline from the horizontal is selected for this purpose since lower angles were not found to reduce the compression force appreciably, whereas higher angles could not limit neck internal motion as well as the selected angle. Besides, higher angles would cause large normal and frictional forces between the translational AWD and the supporting seat structure.

In both RFWMS and DRFWMS, an inner seatback frame (SB) pivots about an outer seatback frame (OF) at  $R^*$  as shown in Figure 6. When the breakaway torque at the rotational AWD at  $R^*$  is overcome due to the pressure applied by the torso on the inner seatback frame, a rotation at  $R^*$  occurs that is in the opposite direction to the rotation at  $R$  of the outer seatback frame. This action provides better occupant retention at high severity impacts by reducing the effective seatback angle; it also moves the head restraint forward with a net effect of reducing the backset. The difference between RFWMS and DRFWMS is that the latter has an inclined translational AWD by 30 degrees from the horizontal. In both RFWMS and DRFWMS, the AWDs at  $R$ ,  $R^*$ , and  $P$  are activated when  $b.V(\text{kph}) > 4.5$ ,  $10.5$ , and  $10.5$ , respectively.

It should be noted that for all of the design concepts, no AWD is activated for values of  $b.V$ s less than 4.5 kph in order to prevent activation during normal daily use. This can easily be achieved in practice by using a sacrificial shear element or through active control.



**Figure 7** Stiffness function for R.

Figure 7 shows the stiffness function of the rotational AWD at  $R$  for all systems. The breakaway torque is around 850 Nm. For rearward rotation at  $R$ , a constant damping coefficient of 1 Nms/degree is used, which is an estimation of the damping coefficient for the recliner structure in typical car seats (Eriksson, 2002). High damping (400 Nms/degree) is applied at  $R$  when the seatback starts rotating forward (rebound motion); thus, seat-back rebound is minimized.

Figure 8 shows the stiffness and damping functions of the rotational AWDs at  $R^*$  for both RFWMS and DRFWMS. In order to obtain optimum performance and to prevent undesired activation of the AWD at  $R^*$  (especially at lower severities), a breakaway

torque of 1350 N was selected after having subjected RFWMS and DRFWMS to a wide range of crash pulses. The AWD at R\* also applies high damping for the reverse (rebound) motion. Finally, the stiffness and damping functions for the translational AWDs are shown in Figure 9.

Figure 10 indicates the typical responses of the translational AWD at P and the rotational AWDs at R and R\* when the seat design concepts with combined rotational and translational AWDs are subjected to the IIWPG standard pulse ( $b.V = 16$  kph,  $a_{mean} = 5$  g,  $a_{peak} = 10$  g). Although the AWD that controls the rotational motion at the recliner (at R) is activated at a lower  $b.V$  value with respect to the translational AWD, once both  $b.V$  thresholds are exceeded, the seat-pan moves backwards rapidly at the initial stages of the impact (between 0 to 50 ms) in comparison to the backwards rotation of the seatback. In other words, the seat moves backwards initially without considerable recliner rotation. The response of the AWD at R\* shows a delay of about 65 ms. However, during this period, the recliner and the seat-pan are in motion; thus, the AWDs at R and P are absorbing energy. When the breakaway torque is overcome, the inner seatback




Figure 8 Stiffness and damping functions for R\*.

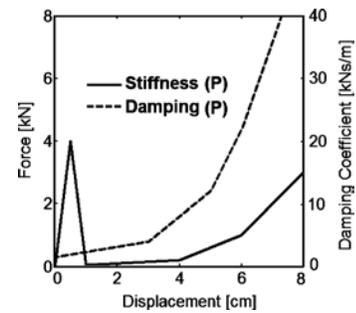


Figure 9 Stiffness and damping functions for P.

frame rotates rapidly with respect to the outer seatback frame, providing relatively earlier head-to-head restraint contact.

## RESULTS

In this section, the performance of the rigid seat (RG), recliner only motion seat (RO), seat-pan only motion seat (SPO), and the four anti-whiplash energy-absorbing seats (WMS, DWMS, RFWMS, and DRFWMS) are evaluated by using the IIWPG standard pulse and the severe crash pulse ( $b.V = 35$  kph,  $a_{mean} = 7.1$  g,  $a_{peak} = 16$  g). The results of the simulations are presented in Table I. A friction coefficient of 0.35 is used for all contacts between the human body and the seat (Verver, 2004). The initial value of the normal force (which is the compression force at  $t = 0$ ) is set to zero as this is a usual practice in displaying the values for the OC normal forces. Head restraint contact times correspond to contact with the head restraint WMHR.  $NIC_{max}$  (Neck Injury Criterion) is also calculated.  $NIC$  is associated with the S-shape deformation of the neck and is based on the relative acceleration and velocity between the OC and T1.

In Table I, the largest values of OC (upper neck) forces are presented. OC shear and tensile forces indicate how strongly the head is thrown backward relative to the seat. For all seats, the largest OC tensile and shear forces occur approximately at the same time, which corresponds approximately to the instant when maximum head retraction in the form of an S-shape is developed. According to the IIWPG neck force classification (IIWPG, 2006), shear forces appear to be on the border of moderate to high, or higher, whereas tensile forces are well within the low neck force range. The compression force occurs very early in the impact. WMS and RFWMS reduce the maximum




Figure 10 AWD displacements in response to the IIWPG standard pulse.

Table I Seat performance in response to the IIWPG standard and severe crash pulses

	IIWPG standard crash pulse						
	RG	RO	SPO	WMS	DWMS	RFWMS	DRFWMS
Fshear (N)	235	358	249	248	240	240	273
Ftensile (N)	-333	-343	-329	-316	-295	-306	-297
Fcomp (N)	252	98	225	113	84	132	102
maxT1 <sub>x-acc</sub> (g)	10	10.2	8.9	7	7.85	6.5	7.8
NIC <sub>max</sub> (m <sup>2</sup> /s <sup>2</sup> )	11.8	11.4	11.13	7.68	7.06	6.81	6.28
HrCt (ms)	50	101	62	108	107	95	94
maxSB- <i>b.θ</i> (degrees)	0	15.8	0	15.5	15.6	11.1	11.43
maxSP- <i>b.x</i> (cm)	0	0	5.41	5.28	4.62	5.3	4.6
maxSP- <i>b.z</i> (cm)	0	0	0	0	2.66	0	2.65
	Severe crash pulse						
	WMS	DWMS	RFWMS	DRFWMS			
maxSB- <i>b.θ</i> (degrees)	20.1	20.2	15.1	15			
maxSP- <i>b.x</i> (cm)	6.9	5.94	6.97	6			
maxSP- <i>b.z</i> (cm)	0	3.43	0	3.46			

OC compression forces, whereas DWMS and DRFWMS cause further reduction in the compression forces by allowing the seat-pan to also move downward by an amount of 1.75 cm during the first 50 ms of the impact. RO, the fixed seat-pan with a rotational AWD at the recliner (at R), also shows low compression force as the seatback rotates quickly, but it generates the highest shear and tensile forces.


Maximum forward T1 x accelerations (maxT1<sub>x-acc</sub>) as shown in Table I are less than the IIWPG threshold value of 9.5 g for all the anti-whiplash seat design concepts. The evaluation of T1 x acceleration and the upper neck forces become more compatible with the IIWPG criteria when head restraint contact is enabled. The head restraint changes the dynamics of the system and the values of these parameters significantly.

The head restraint contact times (HrCt) are 105 ms on average, higher than 70 ms (IIWPG threshold value) for the seat design concepts without the inner seatback frame design (RO, WMS, and DWMS). On the other hand, the head restraint contact times for RG and SPO (i.e., seat designs with fixed seat-backs) are 50 and 62 ms, respectively. Backward rotation of the seatback aids in energy absorption, but this moves the head restraint away from the head, thus extending the head restraint contact time. This is normal for seat designs focusing on energy absorption (Avery et al., 2007). Furthermore, the rigid-body modeling approach does not allow the human body model to sink into the seatback, consequently causing the backset distances to remain effectively larger, resulting in later head restraint contact times. The seats with the inner seatback frame design (RFWMS and DRFWMS) have slightly reduced contact times (95 ms) since the head restraint moves forward as the inner seatback frame rotates in the opposite direction relative to the outer seatback frame under the pressure from the torso.

The anti-whiplash seat design concepts with combined rotational and translational AWDs have favorable energy absorption characteristics and they produce much lower NIC<sub>max</sub> values compared to RG, RO, and SPO. In relation to NIC (Boström et al., 1996), whiplash-mitigating seats can decrease the degree

of S-shape or retraction as shown in Figure 11. In the simulations, the most pronounced S-shape occurs when the lower neck is in extension and at the same time the upper neck has the maximum flexion. The most pronounced (maximum) S-shape is identified by monitoring the intervertebral angles of the neck. It can be seen that, for RG, the initial neck posture as shown in


Figure 1 is transformed into an S-shape and then transition from S-shape to extension takes place, followed by hyperextension. On the other hand, for WMS, head retraction relative to the upper torso is very much limited; hence, the initial neck posture is transformed into neck extension without considerable S-shape deformation. The simulations also indicate that the anti-whiplash seat design concepts such as WMS have the potential to allow larger backset values as a result of limited head retraction (Figure 11).

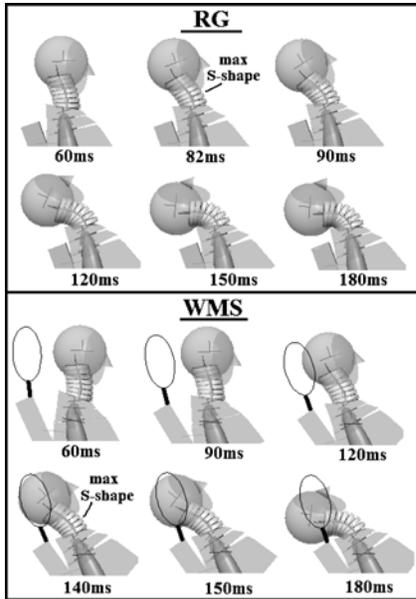

**Figure 11** Comparison of head-and-neck responses of RG and WMS to the IIWPG standard pulse.

As the seats absorb energy, they can limit and delay the development of neck internal motion until the head contacts the head restraint. While head with respect to T1 motion is being minimized with the aid of AWDs, the neck muscle activity that begins at around 75 ms (Ono et al., 1997) becomes effective without any appreciable neck internal motion. Therefore, in the later stages of the impact, the neck becomes more resistant to S-shape and neck extension formation as the AWDs complete their motions. These results are in agreement with the findings of Stemper et al. (2006), who compared the effects of precontracted neck muscles in aware occupants with reflex muscle contraction in unaware occupants by subjecting a validated head-and-neck model to an acceleration pulse applied horizontally at T1 with a severity of  $b.V = 10.5$  kph. In comparison to the reflex muscle contraction in the unaware occupant simulation, precontracted neck musculature with maximum contraction levels before impact stabilized the head and neck, eliminated S-shape curvature, and decreased spinal motions and soft tissue distortions. These findings supported the results of human volunteer experiments in the literature. Considering the above discussion, the anti-whiplash seat design concepts are expected to reduce the injury risks associated with the S-shape injury mechanism.

The inner seatback frame rotation as in RFWMS and DR-FWMS reduces the maximum seatback angular displacement ( $\max SB-b.\theta$ ) by 4 degrees in comparison to WMS and DWMS (see Table I). Simulations using the IIWPG standard pulse have not shown much difference in the ramping effect for the seat designs considered. Besides, since the IIWPG standard pulse is a medium severity pulse and the head restraint WMHR has good geometry, the ramping of the body has not posed any injury risk. However, the presence of such an inner seatback frame effectively reduces the ramping of the body at higher severity impacts. When the severe crash pulse ( $b.V = 35$  kph,  $a_{\text{mean}} = 7.1$  g,  $a_{\text{peak}} = 16$  g) is simulated, the counterrotation of the inner seatback frame decreases the maximum seatback angular displacement by 5 degrees. For each anti-whiplash seat design concept, Figure 12 shows the instant when the torso has

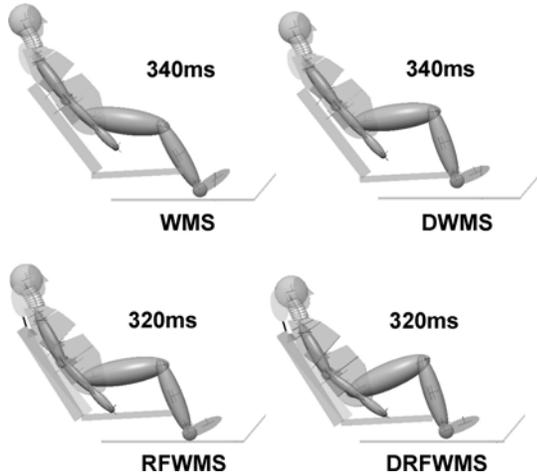

**Figure 12** Comparison of the ramping effect of anti-whiplash seat design concepts at the severe crash pulse.

just started to descend and this approximately corresponds to the highest position of the head. It can be seen that at this severe crash pulse, RFWMS and DRFWMS provide better occupant retention compared to WMS and DWMS.

RFWMS and DRFWMS decrease the backset by 1.5 to 3 cm and this corresponds to 4 to 6 degrees of rotation at  $R^*$ . In the simulations, the inner seatback frame rotation at  $R^*$  reduces the backset by 1.8 cm and 2.7 cm typically for the IIWPG standard and severe crash pulses, respectively, depending on the point where the head makes the first contact with the head restraint.

As shown in Table I, the maximum rearward displacement of the seat-pan ( $\max SP-b.x$ ) varies between 6 to 7 cm at the severe crash pulse, whereas for the IIWPG standard pulse, it is between 4.6 to 5.4 cm. For DWMS and DRFWMS, the maximum downward displacement of the seat-pan ( $\max SP-b.z$ ) is 2.65 and 3.45 cm in response to the IIWPG standard and severe crash pulses, respectively.

## DISCUSSION

Using passive devices only, it is a challenging task to design seats that can operate optimally for all levels of severities. The simulation test results of several anti-whiplash seat design concepts have been investigated using mainly the IIWPG standard pulse and the human body model specifically developed for rear impact. The design strategy used in this article has been applied to a seat with a rigid seatback and seat-pan. No head restraint or seatbelt is used in the simulations. The results indicate that the anti-whiplash seat design concepts, namely, WMS, DWMS, RFWMS, and DRFWMS, all demonstrate good whiplash reducing performances (with only slight differences) at the IIWPG standard pulse. As expected, RG, RO, and SPO show poor performance.

RG and SPO have fixed seatbacks, as a result of which a strong reaction force to the upper torso develops immediately, thus causing severe S-shape deformation rapidly. This is accompanied by strong spine straightening, which leads to high compression forces. In RO, the rotational AWD at the recliner only accounts for energy absorption and therefore the seatback is rotated rapidly. This leads to reduced compression force but, on the other hand, causes high shear and tensile forces. RG, RO, and SPO have high  $NIC_{\max}$  and maximum forward T1 x acceleration values, which are indications of high injury risk.

The anti-whiplash car seat design concepts (WMS, DWMS, RFWMS, and DRFWMS) show similar effectiveness in minimizing neck internal motion. In principle, these four designs employ controlled recliner rotation and seat-pan displacement to limit the formation of S-shape. Their T1 forward acceleration is also lower than the recommended IIWPG limit (9.5 g) specified for energy-absorbing seats. Their  $NIC_{\max}$  values are much lower than the proposed injury threshold value of  $15 \text{ m}^2/\text{s}^2$  (Boström et al., 1996). The head restraint contact time is around 100 ms on average but this would be much lower in reality with a real seat that has some compliance due to the seat foam and suspension, which allows the torso to sink into the seatback,

hence reducing the contact time. The anti-whiplash car seat design concepts induce moderate to high shear but low tensile OC forces according to the IIWPG ratings and much reduced compression forces compared to RG and SPO. However, the use of a good head restraint in conjunction with the AWDs would provide head support in good time, which in turn would prevent neck extension and reduce the shear force applied to the neck by the head. A good head restraint would also help to further limit S-shape deformation and prevent the development of the most pronounced S-shape as investigated in this study.

It can be concluded that there is not much difference among the performance of the four anti-whiplash seat design concepts regarding their responses to the IIWPG standard pulse. However, the seat design concepts with the inner seatback frame have some advantages over the ones without the inner seatback frame. With the aid of inner seatback frame rotation at  $R^*$ , they provide earlier head restraint contact and reduce the effective seatback angle. Especially in higher severity rear impacts, the inner seatback frame rotates further, which helps to reduce the ramping of the body considerably, preventing its ejection and interaction

with the car interior and the rear seat occupant. However, the characteristics of the AWD at  $R^*$  must be adjusted properly so that the inner seatback frame rotation at  $R^*$  must be accompanied by a sufficient amount of outer seatback frame (OF) rotation at  $R$  to avoid increasing the loading on the upper torso in any case.

At the severe crash pulse, the seat design concepts having the downward motion produce slightly less ramping. DRFWMS performs the best as it does not let the head rise over the head restraint and also lowers the position of the head relative to the vehicle floor. This offers good protection for the tall and unbelted occupants in the case of a severe rear impact.

In this study, the rebound effects have not been considered as it would be immaterial due to the absence of seatbelt and head restraint. Besides, since the forward rebound of the seat components is minimized, the rebound of the torso is insignificant for all severities as observed from the simulations.

The proposed energy-absorbing seat design concepts have been shown to limit the neck internal motion successfully, hence reducing injury risks associated with S-shape deformation. However, early head support is also essential to limit the loading on the head-and-neck. As indicated by Viano and Olsen (2001), early head support can enable the head and neck to benefit from a lower relative velocity of impact on the head restraint. Therefore, an anti-whiplash seat can perform best if it absorbs the crash energy effectively and at the same time provides early head support. Hence, if a good head restraint is used in conjunction with the AWDs, the seat design concepts with the inner seatback frame are expected to produce lower head-and-neck loads than WMS and DWMS.

It should be noted that the compliance of the seatback foam and suspension has not been taken into account in this study in order to provide a comparison with the existing JARI test results with a rigid seatback. As in the actual commercial seats used in the automotive industry, the seatback foam and

suspension compliance allow the occupant to sink into the seatback rapidly with little resistance at the very early stages of the impact, reducing head restraint backset distance and contact time. Therefore, seatback foam and suspension compliance will further improve the protection provided by the proposed whiplash-mitigating designs.

## REFERENCES

- Avery M, Giblen E, Weekes AM, Zuby DS. (2007) Developments in Dynamic Whiplash Assessment Procedures. Proc. *International Conference on Neck Injuries in Road Traffic and Prevention Strategies*. Munich, Germany, Paper No. 5, 14 pp.
- Avery M, Weekes AM. (2006) Dynamic Testing of Vehicle Seats to Reduce Whiplash Injury Risk: An International Protocol. Proc. *ICrash 2006 Conference*. Athens, Greece, 11 pp.
- Boström O, Svensson MY, Aldman B, Hansson HA, Håland Y, Lövsund P, Seeman T, Suneson A, Säljö A, Örtengren T. (1996) A New Neck Injury Criterion Candidate-Based on Injury Findings in the Cervical Spinal Ganglia after Experimental Neck Extension Trauma. Proc. *International IRCOBI Conference*, pp. 123–136.
- Davidsson J, Ono K, Inami S, Svensson MY, Lövsund P. (1999) A Comparison between Volunteer, BioRID P3 and Hybrid III Performance in Rear Impacts. Proc. *International IRCOBI Conference*, pp. 165–178.
- Edwards M, Smith S, Zuby DS, Lund AK. (2005) Improved Seat and Head Restraint Evaluations. Proc. *19th ESV Conference*, Paper 05-0374-O.
- Eriksson L. (2002) Three-Dimensional Mathematical Models of the BioRID I and Car Seats, for Low-Speed Rear-End Impacts. *Traffic Inj. Prev.*, Vol. 3, pp. 75–87.
- Himmetoglu S, Acar M, Taylor AJ, Bouazza-Marouf K. (2007) A Multi-body Head and Neck Model for Simulation of Rear Impact in Cars. *Proceedings of the Institution of Mechanical Engineers - Part D: Journal of Automobile Engineering*, Vol. 221, pp. 527–541.
- Himmetoglu S. (2008) Car Seat Design and Human-Body Modelling for Rear Impact Whiplash Mitigation, PhD Thesis, Loughborough University, UK.
- International Insurance Whiplash Prevention Group. (2006) *RCAR-IIWPG Seat/Head Restraint Evaluation Protocol*, Version 2.5. Research Council for Automobile Repairs, available at <http://www.rcar.org/papers.htm>
- Jakobsson L, Lundell B, Norin H, Isaksson-Hellman I. (2000) WHIPS—Volvo's Whiplash Protection Study. *Accid. Anal. Prev.*, Vol. 32, pp. 307–319.
- Linder A, Avery M, Krafft M, Kullgren A. (2003) Change of Velocity and Crash Pulse Characteristics in Rear Impacts: Real-World Data and Vehicle Tests. Proc. *18th ESV Conference*, Paper 285.
- Linder A, Avery M, Krafft M, Kullgren A, Svensson MY. (2001) Acceleration Pulses and Crash Severity in Low Velocity Rear Impacts—Real World Data and Barrier Tests. Proc. *17th ESV Conference*, Paper 216.
- Ono K, Inami S, Kaneoka K, Gotou T, Kisanuki Y, Sakuma S, Miki K. (1999) Relationship between Localized Spine Deformation and Cervical Vertebral Motions for Low Speed Rear Impacts Using Human Volunteers. Proc. *International IRCOBI Conference*, pp. 149–164.
- Ono K, Kaneoka K, Wittek A, Kajzer J. (1997) *Cervical Injury Mechanism Based on the Analysis of Human Cervical Vertebral Motion and Head-Neck-Torso Kinematics during Low-Speed Rear Impacts*.

- SAE paper 973340. Society of Automotive Engineers, Warrendale, PA, USA.
- Schneider LW, Robbins DH, Pflueg MA, Snyder RG. (1983) *Development of Anthropometrically Based Design Specifications for an Advanced Adult Anthropomorphic Dummy Family*, Volume 1. University of Michigan, Transportation Research Institute, Ann Arbor, MI. Report No. UMTRI-83-53-1.
- Stemper BD, Yoganandan N, Cusick JF, Pintar FA. (2006) Stabilizing Effect of Precontracted Neck Musculature in Whiplash. *Spine*, Vol. 31, pp. E733–E738.
- van der Horst MJ. (2002) Human Head Neck Response in Frontal, Lateral and Rear End Impact Loading: Modelling and Validation.
- PhD Thesis, Eindhoven University of Technology, Eindhoven, The Netherlands.
- Verver MM. (2004) Numerical Tools for Comfort Analyses of Automotive Seating. PhD Thesis, Eindhoven University of Technology, Eindhoven, The Netherlands.
- Viano DC. (2002) *Role of the Seat in Rear Crash Safety*. Society of Automotive Engineers, Warrendale, PA.
- Viano DC, Olsen S. (2001) The Effectiveness of Active Head Restraint in Preventing Whiplash. *J. Trauma*, Vol. 51, pp. 959–969.
- Watanabe Y, Ito S. (2007) Influence of Vehicle Properties and Human Attributes on Neck Injuries in Rear-End Collisions. Proc. 20th ESV Conference, Paper 07-0160.